


Metallized Polypropylene Film Capacitor (For DC Link)

■ 外形圖 Outline Drawing (For Example)

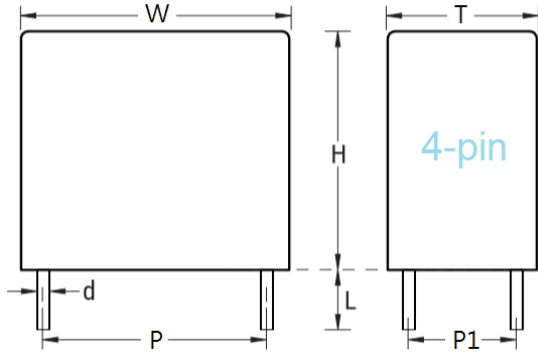

■ 典型應用 Typical Applications

高性能直流濾波器的應用 ·
逆變器、工業和高端電源、太陽能逆變器、充電樁等

High performance DC filter applications
(Inverter, industrial and high-end power supply, solar inverters, charging piles, etc.)

■ 特徵 Features

金屬化聚丙烯膜結構
採用矩形塑料盒型設計
塑料外殼封裝 (UL94V-0) · 環氧樹脂密封
使用 2 或 4 根鍍錫引線

Metalized polypropylene film membrane structure
with a rectangular, plastic box-type design,
Plastic shell package (UL94v-0), Epoxy resin sealing
and uses 2 or 4 tinned wires.

■ 規格 Specifications

參考標準 Reference Standard	GB/T 17702 (IEC 61071)			
氣候類別 Climatic Category	40/85/56			
最大允許外殼溫度 (T _{case})	-40°C~105°C			
Maximum permissible case temperature (T _{case})	+85°C to 105°C: Decreasing factor 1.35% per °C for U _N 85°C			
應用 Application	DC filtering, DC link			
容值範圍 Capacitance Range	1.0μF ~ 140μF			
額定電壓 Rated Voltage (U _{NDC})	450/500Vdc	600Vdc	800Vdc	900Vdc
	1000Vdc	1100Vdc	1200Vdc	--
容值公差 Capacitance Tolerance	±5%(J)、±10%(K)			
引線 Leads	Tinned wires - standard lead wire length 6 (+1/-2) mm			
包裝 Packaging	Packed in cardboard trays with protection for the terminals			

Metallized Polypropylene Film Capacitor (For DC Link)

■ 電氣特性 Electrical Characteristics

端子間耐受電壓 Withstanding voltage (V_{TT})		1.5 x U_{NDC} for 10 s, cut off current 10 mA		
絕緣電阻 Insulation Resistance ($IR \times C_N$)		$\geq 10\ 000\ s$ (25°C, 100Vdc, 60 seconds)		
浪湧電壓 Surge Voltage		1.5 * V_{NDC} for maximum 10 times in lifetime at T = 25°C ±5°C		
過電壓 Over voltage	1.1 x U_N	有負荷時間的 30%	一天內最長持續時間 Maximum duration within one day	30% of on-load duration
	1.15 x U_N	30 分鐘		30 minutes
	1.2 x U_N	5 分鐘		5 minutes
	1.3 x U_N	1 分鐘		1 minutes
自感 Self Inductance (L_S)		< 1nH per mm of lead spacing)		
最大峰值電流 Maximum peak current ↑ (A)		↑ = C x dV/dt		

■ 產品代碼構成 Product code system (For Example)

SMCD	E	505	J	0500	D	2	28	06
型號 Type	內部使用 Internal use	容值 Capacitance	公差 Tolerance	額定電壓 Rated Voltage	交直流 AC/DC	引線類型 Lead form	引線間距 Lead Pitch	引線長度 Lead Length
SMCD= DC Link Capacitor (Boxed)	--	505 =5,000nF =5μF	J=±5% K=±10%	0500=500V 0600=600V 0800=800V 0900=900V 1000=1000V 1200=1200V	D=DC	2=2 pins 4=4 pins P1=10.2mm 5=4 pins P1=12.7mm 6=4 pins P1=20.3mm	28=27.5mm 38=37.5mm 53=52.5mm	06=6.0mm 08=8.0mm

■ 標示 Mark (For Example)

Marking



1. Manufacturer's name: WINDAY	2. SMCD: Type Construction
3. Capacitance: 5μF	4. Capacitors Tolerance: ±5%
5. Rated Voltage: 500VDC	6. Climatic Category: 40/85/56
7. Self-Healing in nature such as SH	8. Date Code : 2210, Year = 2022, Weeks = 10

Metallized Polypropylene Film Capacitor (For DC Link)

■ Dimensions (mm)

U _N , 85°C : 450V/500Vdc												
Cap. μF	W _{±1.0}	H _{±1.0}	T _{±1.0}	P _{±0.5}	P1 _{±0.5}	d _{±0.05}	dV/dt	tanδ x 10 ⁻⁴		ESR @10KHz	I _{max} A	Part number
							V/us	1kHz	10kHz	mΩ		
5.0	32	22	11	27.5	-	0.8	65	10	100	8.5	5	SMCD_505+0500D22806
10	32	24.5	15	27.5	-	0.8	65	10	100	7.5	6.5	SMCD_106+0500D22806
22	32	37	22	27.5	-	0.8	65	10	100	5	10	SMCD_226+0500D22806
30	42	40	20	37.5	10.2	1.0	30	15	150	8	12.5	SMCD_306+0500D43806
35	42	36	24	37.5	10.2	1.0	30	15	150	8	13.5	SMCD_356+0500D43806
40	41.5	37.5	27.5	37.5	10.2	1.0	30	15	150	5	14.5	SMCD_406+0500D43806
50	41	43	28	37.5	12.7	1.2	30	15	150	4	16	SMCD_506+0500D53806
50	42	45	30	37.5	20.3	1.2	30	15	150	4	16	SMCD_506+0500D63806
60	42	45	30	37.5	20.3	1.2	30	15	150	3	16.5	SMCD_606+0500D63806
75	57	43.5	29.5	52.5	12.7	1.2	15	35	350	5.5	16	SMCD_756+0500D55306
75	57	43.5	29.5	52.5	20.3	1.2	15	35	350	5.5	16	SMCD_756+0500D65306
80	57	43.5	29.5	52.5	20.3	1.2	15	35	350	5	16.5	SMCD_806+0500D65306
100	57	50	35	52.5	20.3	1.2	15	35	350	4	18	SMCD_107+0500D65306
110	57	50	35	52.5	20.3	1.2	15	35	350	4	19	SMCD_117+0500D65306

U _N , 85°C : 600Vdc												
Cap. μF	W _{±1.0}	H _{±1.0}	T _{±1.0}	P _{±0.5}	P1 _{±0.5}	d _{±0.05}	dV/dt	tanδ x 10 ⁻⁴		ESR @10KHz	I _{max} A	Part number
							V/us	1kHz	10kHz	mΩ		
2.0	32	18	9	27.5	-	0.8	65	11	100	47.8	2.8	SMCD_205+0600D22806
3.0	32	20	11	27.5	-	0.8	65	11	100	31.8	4.1	SMCD_305+0600D22806
4.0	32	20	11	27.5	-	0.8	65	11	100	23.9	5.5	SMCD_405+0600D22806
5.0	32	22	13	27.5	-	0.8	65	11	100	19.1	6.9	SMCD_505+0600D22806
6.0	32	24.5	15	27.5	-	0.8	65	11	100	18.6	7.1	SMCD_605+0600D22806
7.0	32	24.5	15	27.5	-	0.8	65	11	100	15.9	8.3	SMCD_705+0600D22806
8.0	32	28	14	27.5	-	0.8	65	11	100	13.9	9.5	SMCD_805+0600D22806
9.0	32	30	16	27.5	-	0.8	65	11	100	12.4	10.7	SMCD_905+0600D22806
10	32	30	16	27.5	-	0.8	65	11	100	11.1	11	SMCD_106+0600D22806
12	32	33	18	27.5	-	0.8	65	11	100	10.8	12	SMCD_126+0600D22806

Metallized Polypropylene Film Capacitor (For DC Link)

■ Dimensions (mm)

$U_N, 85^\circ\text{C} : 600\text{Vdc}$

Cap. μF	$W_{\pm 1.0}$	$H_{\pm 1.0}$	$T_{\pm 1.0}$	$P_{\pm 0.5}$	$P1_{\pm 0.5}$	$d_{\pm 0.05}$	dV/dt	$\tan\delta \times 10^{-4}$		ESR @10KHz	I_{max}	Part number
							V/us	1kHz	10kHz	m Ω	A	
15	32	37	22	27.5	-	0.8	65	11	100	9	12	SMCD_156+0600D22806
15	32	37	22	27.5	10.2	0.8	65	11	100	7.4	16.5	SMCD_156+0600D42806
18	32	37	22	27.5	-	0.8	65	11	100	8	12	SMCD_186+0600D22806
18	32	37	22	27.5	12.7	0.8	65	11	100	6.2	17	SMCD_186+0600D52806
10	41	30	16	37.5	-	1.0	30	20	175	19.5	6.2	SMCD_106+0600D23806
12	41	30	16	37.5	-	1.0	30	20	175	16.3	7.4	SMCD_126+0600D23806
15	41	33.5	18.5	37.5	-	1.0	30	20	175	13	9.2	SMCD_156+0600D23806
20	42	40	20	37.5	10.2	1.0	30	20	175	9.8	12.3	SMCD_206+0600D43806
22	42	40	20	37.5	10.2	1.0	30	20	175	8.9	13.5	SMCD_226+0600D43806
25	42	40	20	37.5	10.2	1.0	30	20	175	7.8	15.4	SMCD_256+0600D43806
30	42	44	24	37.5	12.7	1.0	30	20	175	6.5	18.5	SMCD_306+0600D53806
35	42	45	30	37.5	12.7	1.2	30	20	175	6	20.1	SMCD_356+0600D53806
35	42	45	30	37.5	20.3	1.2	30	20	175	6	20.1	SMCD_356+0600D63806
40	42	45	30	37.5	12.7	1.2	30	20	175	5.2	23	SMCD_406+0600D53806
40	42	45	30	37.5	20.3	1.2	30	20	175	5.2	23	SMCD_406+0600D63806
45	42	50	35	37.5	12.7	1.2	30	20	175	4.6	25.8	SMCD_456+0600D53806
45	42	50	35	37.5	20.3	1.2	30	20	175	4.6	25.8	SMCD_456+0600D63806
50	42	50	35	37.5	20.3	1.2	30	20	175	4.2	28.7	SMCD_506+0600D63806
55	42	50	35	37.5	20.3	1.2	30	20	175	3.8	31.6	SMCD_556+0600D63806
60	42	55	40	37.5	20.3	1.2	30	20	175	3.5	34.5	SMCD_606+0600D63806
65	42	55	40	37.5	20.3	1.2	30	20	175	3.2	35	SMCD_656+0600D63806
70	42	55	40	37.5	20.3	1.2	30	20	175	3.0	35	SMCD_706+0600D63806
75	42	60	45	37.5	20.3	1.2	30	20	175	2.8	35	SMCD_756+0600D63806
80	42	60	45	37.5	20.3	1.2	30	20	175	2.6	35	SMCD_806+0600D63806
85	42	60	45	37.5	20.3	1.2	30	20	175	2.5	35	SMCD_856+0600D63806

(1) Equivalent series resistance typical values at $f = 10 \text{ kHz}$

(2) Maximum RMS current at 10 kHz, $\theta_{\text{amb}}=70^\circ\text{C}$ (cooling-air temperature), $\Delta\theta_{\text{case}}=15^\circ\text{C}$ (container temperature rise)

(3) The symbol + means capacitance tolerance ($J=\pm 5\%$, $K=\pm 10\%$)

Metallized Polypropylene Film Capacitor (For DC Link)

■ Dimensions (mm)

$U_N, 85^\circ\text{C} : 600\text{Vdc}$

Cap. μF	$W_{\pm 1.0}$	$H_{\pm 1.0}$	$T_{\pm 1.0}$	$P_{\pm 0.5}$	$P1_{\pm 0.5}$	$d_{\pm 0.05}$	dV/dt	$\tan\delta \times 10^{-4}$		ESR @10KHz	I_{max}	Part number
							V/us	1kHz	10kHz	m Ω	A	
40	57	45	25	52.5	12.7	1.2	15	36	350	9.8	12.3	SMCD_406+0600D55306
45	57	45	25	52.5	12.7	1.2	15	36	350	8.7	13.8	SMCD_456+0600D55306
50	57	45	25	52.5	12.7	1.2	15	36	350	7.8	15.4	SMCD_506+0600D55306
55	57	43.5	29.5	52.5	12.7	1.2	15	36	350	7.1	16.9	SMCD_556+0600D55306
55	57	43.5	29.5	52.5	20.3	1.2	15	36	350	7.1	16.9	SMCD_556+0600D65306
60	57	43.5	29.5	52.5	12.7	1.2	15	36	350	6.5	18.5	SMCD_606+0600D55306
60	57	43.5	29.5	52.5	20.3	1.2	15	36	350	6.5	18.5	SMCD_606+0600D65306
65	57	50	35	52.5	12.7	1.2	15	36	350	6.0	20	SMCD_656+0600D55306
65	57	50	35	52.5	20.3	1.2	15	36	350	6.0	20	SMCD_656+0600D65306
70	57	50	35	52.5	20.3	1.2	15	36	350	5.6	21.5	SMCD_706+0600D65306
75	57	50	35	52.5	20.3	1.2	15	36	350	5.2	23.1	SMCD_756+0600D65306
80	57	50	35	52.5	20.3	1.2	15	36	350	4.9	24.6	SMCD_806+0600D65306
85	57	55	45	52.5	20.3	1.2	15	36	350	4.8	25.1	SMCD_856+0600D65306
90	57	55	45	52.5	20.3	1.2	15	36	350	4.6	25.8	SMCD_906+0600D65306
95	57	55	45	52.5	20.3	1.2	15	36	350	4.4	27.3	SMCD_956+0600D65306
100	57	55	45	52.5	20.3	1.2	15	36	350	4.2	28.7	SMCD_107+0600D65306
110	57	55	45	52.5	20.3	1.2	15	36	350	3.8	31.6	SMCD_117+0600D65306
120	57	65	45	52.5	20.3	1.2	15	36	350	3.5	34.5	SMCD_127+0600D65306
130	57	65	45	52.5	20.3	1.2	15	36	350	3.2	35	SMCD_137+0600D65306
140	57	65	45	52.5	20.3	1.2	15	36	350	3.0	35	SMCD_147+0600D65306

(1) Equivalent series resistance typical values at $f = 10 \text{ kHz}$

(2) Maximum RMS current at 10 kHz, $\theta_{\text{amb}}=70^\circ\text{C}$ (cooling-air temperature), $\Delta\theta_{\text{case}}=15^\circ\text{C}$ (container temperature rise)

(3) The symbol + means capacitance tolerance ($J=\pm 5\%$, $K=\pm 10\%$)

Metallized Polypropylene Film Capacitor (For DC Link)

■ Dimensions (mm)

$U_N, 85^\circ\text{C} : 800\text{Vdc}$

Cap. μF	$W_{\pm 1.0}$	$H_{\pm 1.0}$	$T_{\pm 1.0}$	$P_{\pm 0.5}$	$P1_{\pm 0.5}$	$d_{\pm 0.05}$	dV/dt	$\tan\delta \times 10^{-4}$		ESR @10kHz	I_{max}	Part number
							V/us	1kHz	10kHz	m Ω	A	
2.0	32	18	9	27.5	-	0.8	65	10	95	45.4	2.9	SMCD_205+0800D22806
3.0	32	20	11	27.5	-	0.8	65	10	95	30.3	4.4	SMCD_305+0800D22806
3.3	32	30	16	27.5	-	0.8	65	10	95	18.8	7.0	SMCD_335+0800D22806
4.0	32	25	13	27.5	-	0.8	65	10	95	22.7	5.8	SMCD_405+0800D22806
5.0	32	24.5	15	27.5	-	0.8	65	10	95	18.2	7.3	SMCD_505+0800D22806
6.0	32	30	16	27.5	-	0.8	65	10	95	15.1	8.7	SMCD_605+0800D22806
7.0	32	30	16	27.5	-	0.8	65	10	95	13.0	10.2	SMCD_705+0800D22806
8.0	32	33	18	27.5	-	0.8	65	10	95	12.5	10.5	SMCD_805+0800D22806
9.0	32	33	18	27.5	-	0.8	65	10	95	11.1	11.8	SMCD_905+0800D22806
10	32	37	22	27.5	-	0.8	65	10	95	11.0	12.0	SMCD_106+0800D22806
10	32	37	22	27.5	10.2	0.8	65	10	95	9.1	14.5	SMCD_106+0800D42806
11	32	37	22	27.5	-	0.8	65	10	95	10.0	12.0	SMCD_116+0800D22806
11	32	37	22	27.5	10.2	0.8	65	10	95	8.3	16.0	SMCD_116+0800D42806
12	32	37	22	27.5	-	0.8	65	10	95	9.3	12.0	SMCD_126+0800D22806
12	32	37	22	27.5	10.2	0.8	65	10	95	7.6	16.0	SMCD_126+0800D42806
13	32	37	22	27.5	-	0.8	65	10	95	8.8	12.0	SMCD_136+0800D22806
13	32	37	22	27.5	12.7	0.8	65	10	95	8.1	16.2	SMCD_136+0800D52806
14	32	37	22	27.5	-	0.8	65	10	95	8.2	12.0	SMCD_146+0800D22806
14	32	37	22	27.5	12.7	0.8	65	10	95	7.6	16.5	SMCD_146+0800D52806
8.0	41	30	16	37.5	-	1.0	30	18	160	22.3	5.4	SMCD_805+0800D23806
9.0	41	30	16	37.5	-	1.0	30	18	160	19.8	6.1	SMCD_905+0800D23806
10	41	33.5	18.5	37.5	-	1.0	30	18	160	17.8	6.7	SMCD_106+0800D23806
12	41	33.5	18.5	37.5	-	1.0	30	18	160	14.9	8.1	SMCD_126+0800D23806
15	42	40	20	37.5	10.2	1.0	30	18	160	11.9	10.1	SMCD_156+0800D43806
20	42	44	24	37.5	12.7	1.0	30	18	160	8.9	13.5	SMCD_206+0800D53806
25	42	44	24	37.5	12.7	1.0	30	18	160	7.1	16.8	SMCD_256+0800D53806
30	42	45	30	37.5	12.7	1.2	30	18	160	5.9	20.2	SMCD_306+0800D53806
30	42	45	30	37.5	20.3	1.2	30	18	160	5.9	20.2	SMCD_306+0800D63806

(1) Equivalent series resistance typical values at $f = 10 \text{ kHz}$

(2) Maximum RMS current at 10 kHz, $\theta_{\text{amb}}=70^\circ\text{C}$ (cooling-air temperature), $\Delta\theta_{\text{case}}=15^\circ\text{C}$ (container temperature rise)

(3) The symbol + means capacitance tolerance ($J=\pm 5\%$, $K=\pm 10\%$)

Metallized Polypropylene Film Capacitor (For DC Link)

■ Dimensions (mm)

$U_N, 85^\circ\text{C} : 800\text{Vdc}$

Cap. μF	$W_{\pm 1.0}$	$H_{\pm 1.0}$	$T_{\pm 1.0}$	$P_{\pm 0.5}$	$P1_{\pm 0.5}$	$d_{\pm 0.05}$	dV/dt	$\tan\delta \times 10^{-4}$		ESR @10KHz	I_{max}	Part number
							V/us	1kHz	10kHz	m Ω	A	
35	42	50	35	37.5	20.3	1.2	30	18	160	5.5	22.0	SMCD_356+0800D63806
40	42	50	35	37.5	20.3	1.2	30	18	160	4.8	25.1	SMCD_406+0800D63806
45	42	55	40	37.5	20.3	1.2	30	18	160	4.2	28.3	SMCD_456+0800D63806
50	42	55	40	37.5	20.3	1.2	30	18	160	3.8	31.4	SMCD_506+0800D63806
55	42	60	45	37.5	20.3	1.2	30	18	160	3.5	34.5	SMCD_556+0800D63806
60	42	60	45	37.5	20.3	1.2	30	18	160	3.2	35	SMCD_606+0800D63806
65	42	60	45	37.5	20.3	1.2	30	18	160	2.9	35	SMCD_656+0800D63806
25	57	45	25	52.5	12.7	1.2	15	33	320	14.3	8.4	SMCD_256+0800D55306
30	57	45	25	52.5	12.7	1.2	15	33	320	11.9	10.1	SMCD_306+0800D55306
35	57	45	25	52.5	12.7	1.2	15	33	320	10.2	11.8	SMCD_356+0800D55306
40	57	43.5	29.5	52.5	12.7	1.2	15	33	320	8.9	13.5	SMCD_406+0800D55306
40	57	43.5	29.5	52.5	20.3	1.2	15	33	320	8.9	13.5	SMCD_406+0800D65306
45	57	43.5	29.5	52.5	12.7	1.2	15	33	320	7.9	15.1	SMCD_456+0800D55306
45	57	43.5	29.5	52.5	20.3	1.2	15	33	320	7.9	15.1	SMCD_456+0800D65306
50	57	50	35	52.5	12.7	1.2	15	33	320	7.1	16.8	SMCD_506+0800D55306
50	57	50	35	52.5	20.3	1.2	15	33	320	7.1	16.8	SMCD_506+0800D65306
55	57	50	35	52.5	20.3	1.2	15	33	320	6.5	18.5	SMCD_556+0800D65306
60	57	55	35	52.5	20.3	1.2	15	33	320	5.9	20.2	SMCD_606+0800D65306
65	57	55	45	52.5	20.3	1.2	15	33	320	5.5	21.9	SMCD_656+0800D65306
70	57	55	45	52.5	20.3	1.2	15	33	320	5.1	23.6	SMCD_706+0800D65306
75	57	55	45	52.5	20.3	1.2	15	33	320	4.8	25.2	SMCD_756+0800D65306
80	57	55	45	52.5	20.3	1.2	15	33	320	4.6	25.9	SMCD_806+0800D65306
85	57	55	45	52.5	20.3	1.2	15	33	320	4.5	26.7	SMCD_856+0800D65306
90	57	55	45	52.5	20.3	1.2	15	33	320	4.2	28.3	SMCD_906+0800D65306
95	57	65	45	52.5	20.3	1.2	15	33	320	4.0	29.8	SMCD_956+0800D65306
100	57	65	45	52.5	20.3	1.2	15	33	320	3.8	31.4	SMCD_107+0800D65306
110	57	65	45	52.5	20.3	1.2	15	33	320	3.5	34.5	SMCD_117+0800D65306

(1) Equivalent series resistance typical values at $f = 10 \text{ kHz}$

(2) Maximum RMS current at 10 kHz, $\theta_{\text{amb}}=70^\circ\text{C}$ (cooling-air temperature), $\Delta\theta_{\text{case}}=15^\circ\text{C}$ (container temperature rise)

(3) The symbol + means capacitance tolerance ($J=\pm 5\%$, $K=\pm 10\%$)

Metallized Polypropylene Film Capacitor (For DC Link)

■ Dimensions (mm)

$U_N, 85^\circ\text{C} : 900\text{Vdc}$

Cap. μF	$W_{\pm 1.0}$	$H_{\pm 1.0}$	$T_{\pm 1.0}$	$P_{\pm 0.5}$	$P1_{\pm 0.5}$	$d_{\pm 0.05}$	dV/dt	$\tan\delta \times 10^{-4}$		ESR @10KHz	I_{max}	Part number
							V/us	1kHz	10kHz	m Ω	A	
1.0	32	18	9	27.5	-	0.8	70	9	90	86	1.5	SMCD_105+0900D22806
2.0	32	20	11	27.5	-	0.8	70	9	90	43	3.1	SMCD_205+0900D22806
3.0	32	22	13	27.5	-	0.8	70	9	90	28.7	4.6	SMCD_305+0900D22806
4.0	32	24.5	15	27.5	-	0.8	70	9	90	21.5	6.1	SMCD_405+0900D22806
5.0	32	30	16	27.5	-	0.8	70	9	90	17.2	7.7	SMCD_505+0900D22806
6.0	32	33	18	27.5	-	0.8	70	9	90	18	6.9	SMCD_605+0900D22806
7.0	32	33	18	27.5	-	0.8	70	9	90	13	10.2	SMCD_705+0900D22806
8.0	32	37	22	27.5	-	0.8	70	9	90	11.5	11.4	SMCD_805+0900D22806
8.0	32	37	22	27.5	10.2	0.8	70	9	90	10.7	12.3	SMCD_805+0900D42806
9.0	32	37	22	27.5	-	0.8	70	9	90	10.4	12.0	SMCD_905+0900D22806
9.0	32	37	22	27.5	12.7	0.8	70	9	90	9.6	13.8	SMCD_905+0900D52806
10	32	37	22	27.5	-	0.8	70	9	90	12	12.2	SMCD_106+0900D22806
10	32	37	22	27.5	12.7	0.8	70	9	90	8.6	15.4	SMCD_106+0900D52806
4.7	41	26	15	37.5	-	1.0	35	17	150	35.6	3.4	SMCD_475+0900D23806
5.0	41	30	16	37.5	-	1.0	35	17	150	33.4	3.6	SMCD_505+0900D23806
6.0	41	30	16	37.5	-	1.0	35	17	150	27.9	4.3	SMCD_605+0900D23806
7.0	41	30	16	37.5	-	1.0	35	17	150	23.9	5.0	SMCD_705+0900D23806
8.0	41	33	18	37.5	-	1.0	35	17	150	20.9	5.7	SMCD_805+0900D23806
10	42	40	20	37.5	10.2	1.0	35	17	150	16.7	7.2	SMCD_106+0900D43806
12	41	37	22	37.5	10.2	1.0	35	17	150	13.9	8.6	SMCD_126+0900D43806
15	42	44	24	37.5	12.7	1.0	35	17	150	11.1	10.8	SMCD_156+0900D53806
18	42	44	24	37.5	12.7	1.0	35	17	150	9.3	12.9	SMCD_186+0900D53806
20	42	44	24	37.5	12.7	1.0	35	17	150	8.4	14.4	SMCD_206+0900D53806
25	42	45	30	37.5	12.7	1.2	35	17	150	6.7	17.9	SMCD_256+0900D53806
25	42	45	30	37.5	20.3	1.2	35	17	150	6.7	17.9	SMCD_256+0900D63806
30	42	50	35	37.5	20.3	1.2	35	17	150	5.6	21.5	SMCD_306+0900D63806
35	42	55	40	37.5	20.3	1.2	35	17	150	5.1	23.4	SMCD_356+0900D63806
40	42	55	40	37.5	20.3	1.2	35	17	150	4.5	26.8	SMCD_406+0900D63806
45	42	60	45	37.5	20.3	1.2	35	17	150	4.0	30.1	SMCD_456+0900D63806
50	42	60	45	37.5	20.3	1.2	35	17	150	3.6	33.5	SMCD_506+0900D63806

Metallized Polypropylene Film Capacitor (For DC Link)

■ Dimensions (mm)

$U_N, 85^\circ\text{C} : 900\text{Vdc}$

Cap. μF	$W_{\pm 1.0}$	$H_{\pm 1.0}$	$T_{\pm 1.0}$	$P_{\pm 0.5}$	$P1_{\pm 0.5}$	$d_{\pm 0.05}$	dV/dt	$\tan\delta \times 10^{-4}$		ESR @10KHz	I_{max}	Part number
							V/us	1kHz	10kHz	m Ω	A	
15	57	45	25	52.5	10.2	1.2	15	31	300	22.3	5.4	SMCD_156+0900D45306
20	57	45	25	52.5	12.7	1.2	15	31	300	16.7	7.2	SMCD_206+0900D55306
25	57	45	25	52.5	12.7	1.2	15	31	300	13.4	9.0	SMCD_256+0900D55306
30	57	43.5	29.5	52.5	12.7	1.2	15	31	300	11.1	10.8	SMCD_306+0900D55306
30	57	43.5	29.5	52.5	20.3	1.2	15	31	300	11.1	10.8	SMCD_306+0900D65306
35	57	43.5	29.5	52.5	12.7	1.2	15	31	300	9.6	12.6	SMCD_356+0900D55306
35	57	50	29.5	52.5	20.3	1.2	15	31	300	9.6	12.6	SMCD_356+0900D65306
40	57	50	35	52.5	20.3	1.2	15	31	300	8.4	14.4	SMCD_406+0900D65306
45	57	50	35	52.5	20.3	1.2	15	31	300	7.4	16.1	SMCD_456+0900D65306
50	57	50	35	52.5	20.3	1.2	15	31	300	6.7	17.9	SMCD_506+0900D65306
55	57	55	45	52.5	20.3	1.2	15	31	300	6.1	19.7	SMCD_556+0900D65306
60	57	55	45	52.5	20.3	1.2	15	31	300	5.6	21.5	SMCD_606+0900D65306
65	57	55	45	52.5	20.3	1.2	15	31	300	5.1	23.3	SMCD_656+0900D65306
70	57	65	45	52.5	20.3	1.2	15	31	300	4.8	25.1	SMCD_706+0900D65306
75	57	65	45	52.5	20.3	1.2	15	31	300	4.7	25.7	SMCD_756+0900D65306
80	57	65	45	52.5	20.3	1.2	15	31	300	4.5	26.8	SMCD_806+0900D65306
85	57	65	45	52.5	20.3	1.2	15	31	300	4.2	28.5	SMCD_856+0900D65306

(1) Equivalent series resistance typical values at $f = 10 \text{ kHz}$

(2) Maximum RMS current at 10 kHz, $\theta_{\text{amb}}=70^\circ\text{C}$ (cooling-air temperature), $\Delta\theta_{\text{case}}=15^\circ\text{C}$ (container temperature rise)

(3) The symbol + means capacitance tolerance ($J=\pm 5\%$, $K=\pm 10\%$)

Metallized Polypropylene Film Capacitor (For DC Link)

■ Dimensions (mm)

$U_N, 85^\circ\text{C} : 1000\text{Vdc}$

Cap. μF	$W_{\pm 1.0}$	$H_{\pm 1.0}$	$T_{\pm 1.0}$	$P_{\pm 0.5}$	$P1_{\pm 0.5}$	$d_{\pm 0.05}$	dV/dt	$\tan\delta \times 10^{-4}$		ESR @10KHz	I_{max}	Part number
							V/us	1kHz	10kHz	m Ω	A	
1.0	32	18	9	27.5	-	0.8	75	8	80	76.4	1.7	SMCD_105+1000D22806
2.0	32	22	13	27.5	-	0.8	75	8	80	38.2	3.5	SMCD_205+1000D22806
3.0	32	24.5	15	27.5	-	0.8	75	8	80	25.5	5.2	SMCD_305+1000D22806
4.0	32	30	16	27.5	-	0.8	75	8	80	19.1	6.9	SMCD_405+1000D22806
5.0	32	33	18	27.5	-	0.8	75	8	80	15.3	8.6	SMCD_505+1000D22806
6.0	32	33	18	27.5	-	0.8	75	8	80	14.9	8.9	SMCD_605+1000D22806
7.0	32	37	22	27.5	-	0.8	75	8	80	14.5	9.4	SMCD_705+1000D22806
7.0	32	37	22	27.5	12.7	0.8	75	8	80	11.4	11.6	SMCD_705+1000D52806
8.0	32	37	22	27.5	-	0.8	75	8	80	13.0	10.8	SMCD_805+1000D22806
8.0	32	37	22	27.5	12.7	1.0	75	8	80	10.0	13.3	SMCD_805+1000D52806
5.0	41	30	16	37.5	-	1.0	37	15	140	31.2	3.8	SMCD_505+1000D23806
6.0	41	30	16	37.5	-	1.0	37	15	140	26.0	4.6	SMCD_605+1000D23806
7.0	41	33	18	37.5	-	1.0	37	15	140	22.3	5.4	SMCD_705+1000D23806
8.0	41	33	18	37.5	-	1.0	37	15	140	19.5	6.2	SMCD_805+1000D23806
10	42	40	20	37.5	-	1.0	37	15	140	15.6	6.7	SMCD_106+1000D23806
10	42	40	20	37.5	10.2	1.0	37	15	140	15.6	7.7	SMCD_106+1000D43806
12	41	37	22	37.5	12.7	1.0	37	15	140	13.0	9.2	SMCD_126+1000D53806
12	41	37	22	37.5	-	1.0	37	15	140	15.0	8.0	SMCD_126+1000D23806
15	42	44	24	37.5	12.7	1.0	37	15	140	10.4	11.5	SMCD_156+1000D53806
18	42	45	30	37.5	12.7	1.2	37	15	140	8.7	13.8	SMCD_186+1000D53806
18	42	45	30	37.5	20.3	1.2	37	15	140	8.7	13.8	SMCD_186+1000D63806
20	42	45	30	37.5	12.7	1.2	37	15	140	7.8	15.4	SMCD_206+1000D53806
20	42	45	30	37.5	20.3	1.2	37	15	140	7.8	15.4	SMCD_206+1000D63806
25	42	50	35	37.5	20.3	1.2	37	15	140	6.2	19.2	SMCD_256+1000D63806
30	42	55	40	37.5	20.3	1.2	37	15	140	5.2	23.1	SMCD_306+1000D63806
35	42	55	40	37.5	20.3	1.2	37	15	140	4.8	25.1	SMCD_356+1000D63806
40	42	60	45	37.5	20.3	1.2	37	15	140	4.2	28.7	SMCD_406+1000D63806

(1) Equivalent series resistance typical values at $f = 10 \text{ kHz}$

(2) Maximum RMS current at 10 kHz, $\theta_{\text{amb}}=70^\circ\text{C}$ (cooling-air temperature), $\Delta\theta_{\text{case}}=15^\circ\text{C}$ (container temperature rise)

(3) The symbol + means capacitance tolerance ($J=\pm 5\%$, $K=\pm 10\%$)

Metallized Polypropylene Film Capacitor (For DC Link)

■ Dimensions (mm)

$U_N, 85^\circ\text{C} : 1000\text{Vdc}$

Cap. μF	$W_{\pm 1.0}$	$H_{\pm 1.0}$	$T_{\pm 1.0}$	$P_{\pm 0.5}$	$P1_{\pm 0.5}$	$d_{\pm 0.05}$	dV/dt	$\tan\delta \times 10^{-4}$		ESR @10KHz	I_{max}	Part number
							V/us	1kHz	10kHz	m Ω	A	
15	57	45	25	52.5	12.7	1.2	17	28	280	20.8	5.8	SMCD_156+1000D55306
20	57	45	25	52.5	12.7	1.2	17	28	280	15.6	7.7	SMCD_206+1000D55306
25	57	45	25	52.5	12.7	1.2	17	28	280	12.5	9.6	SMCD_256+1000D55306
30	57	45	30	52.5	12.7	1.2	17	28	280	10.4	11.5	SMCD_306+1000D55306
30	57	45	30	52.5	20.3	1.2	17	28	280	10.4	11.5	SMCD_306+1000D65306
35	57	50	35	52.5	20.3	1.2	17	28	280	8.9	13.5	SMCD_356+1000D65306
40	57	50	35	52.5	20.3	1.2	17	28	280	7.8	15.4	SMCD_406+1000D65306
45	57	55	45	52.5	20.3	1.2	17	28	280	6.9	17.3	SMCD_456+1000D65306
50	57	55	45	52.5	20.3	1.2	17	28	280	6.2	19.2	SMCD_506+1000D65306
55	57	55	45	52.5	20.3	1.2	17	28	280	5.7	21.1	SMCD_556+1000D65306
60	57	65	45	52.5	20.3	1.2	17	28	280	5.2	23.1	SMCD_606+1000D65306
65	57	65	45	52.5	20.3	1.2	17	28	280	4.8	25.0	SMCD_656+1000D65306
70	57	65	45	52.5	20.3	1.2	17	28	280	4.5	26.9	SMCD_706+1000D65306

(1) Equivalent series resistance typical values at $f = 10 \text{ kHz}$

(2) Maximum RMS current at 10 kHz, $\theta_{\text{amb}}=70^\circ\text{C}$ (cooling-air temperature), $\Delta\theta_{\text{case}}=15^\circ\text{C}$ (container temperature rise)

(3) The symbol + means capacitance tolerance ($J=\pm 5\%$, $K=\pm 10\%$)

Metallized Polypropylene Film Capacitor (For DC Link)

■ Dimensions (mm)

$U_N, 85^\circ\text{C} : 1100\text{Vdc}$

Cap. μF	$W_{\pm 1.0}$	$H_{\pm 1.0}$	$T_{\pm 1.0}$	$P_{\pm 0.5}$	$P1_{\pm 0.5}$	$d_{\pm 0.05}$	dV/dt	$\tan\delta \times 10^{-4}$		ESR @10kHz	I_{max}	Part number
							V/us	1kHz	10kHz	m Ω	A	
0.68	32	20	11	27.5	-	0.8	80	8	70	80.0	1.7	SMCD_684+1100D22806
1.0	32	20	11	27.5	-	0.8	80	8	70	59.4	2.2	SMCD_105+1100D22806
1.5	32	22	13	27.5	-	0.8	80	8	70	55.7	2.4	SMCD_155+1100D22806
2.0	32	25	13	27.5	-	0.8	80	8	70	27.9	4.7	SMCD_205+1100D22806
3.0	32	30	16	27.5	-	0.8	80	8	70	20.4	6.5	SMCD_305+1100D22806
4.0	32	33	18	27.5	-	0.8	80	8	70	15.3	8.6	SMCD_405+1100D22806
5.0	32	37	22	27.5	-	0.8	80	8	70	14.0	9.8	SMCD_505+1100D22806
5.0	32	37	22	27.5	10.2	0.8	80	8	70	12.3	10.8	SMCD_505+1100D42806
6.0	32	37	22	27.5	-	0.8	80	8	70	12.3	10.8	SMCD_605+1100D22806
6.0	32	37	22	27.5	10.2	0.8	80	8	70	10.2	12.9	SMCD_605+1100D42806
3.0	41	30	16	37.5	-	1.0	40	15	130	48.3	2.5	SMCD_305+1100D23806
4.0	41	30	16	37.5	-	1.0	40	15	130	36.2	3.3	SMCD_405+1100D23806
4.7	41	33.5	18.5	37.5	-	1.0	40	15	130	30.8	3.9	SMCD_475+1100D23806
5.0	41	33.5	18.5	37.5	-	1.0	40	15	130	29.0	4.1	SMCD_505+1100D23806
6.0	41	33.5	18.5	37.5	-	1.0	40	15	130	24.2	5.0	SMCD_605+1100D23806
7.0	42	40	20	37.5	10.2	1.0	40	15	130	20.7	5.8	SMCD_705+1100D43806
8.0	41	37	22	37.5	10.2	1.0	40	15	130	18.1	6.6	SMCD_805+1100D43806
9.0	41	37	22	37.5	12.7	1.0	40	15	130	16.1	7.5	SMCD_905+1100D53806
10	42	44	24	37.5	12.7	1.0	40	15	130	14.5	8.3	SMCD_106+1100D53806
12	42	44	24	37.5	12.7	1.0	40	15	130	12.1	9.9	SMCD_126+1100D53806
12	42	44	24	37.5	-	1.0	40	15	130	14.0	8.6	SMCD_126+1100D23806
15	42	45	30	37.5	12.7	1.2	40	15	130	9.7	12.4	SMCD_156+1100D53806
15	42	45	30	37.5	20.3	1.2	40	15	130	9.7	12.4	SMCD_156+1100D63806
18	42	50	35	37.5	20.3	1.2	40	15	130	8.1	14.9	SMCD_186+1100D63806
20	42	50	35	37.5	20.3	1.2	40	15	130	7.2	16.6	SMCD_206+1100D63806
25	42	55	40	37.5	20.3	1.2	40	15	130	5.8	20.7	SMCD_256+1100D63806
30	42	60	45	37.5	20.3	1.2	40	15	130	4.8	24.8	SMCD_306+1100D63806

(1) Equivalent series resistance typical values at $f = 10 \text{ kHz}$

(2) Maximum RMS current at 10 kHz, $\theta_{\text{amb}} = 70^\circ\text{C}$ (cooling-air temperature), $\Delta\theta_{\text{case}} = 15^\circ\text{C}$ (container temperature rise)

(3) The symbol + means capacitance tolerance ($J = \pm 5\%$, $K = \pm 10\%$)

Metallized Polypropylene Film Capacitor (For DC Link)

■ Dimensions (mm)

$U_N, 85^\circ\text{C} : 1100\text{Vdc}$

Cap. μF	$W_{\pm 1.0}$	$H_{\pm 1.0}$	$T_{\pm 1.0}$	$P_{\pm 0.5}$	$P1_{\pm 0.5}$	$d_{\pm 0.05}$	dV/dt	$\tan\delta \times 10^{-4}$		ESR @10KHz	I_{max}	Part number
							V/us	1kHz	10kHz	m Ω	A	
20	57	43.5	29.5	52.5	12.7	1.2	20	27	260	14.5	8.3	SMCD_206+1100D55306
20	57	43.5	29.5	52.5	20.3	1.2	20	27	260	14.5	8.3	SMCD_206+1100D65306
25	57	50	35	52.5	20.3	1.2	20	27	260	11.6	10.4	SMCD_256+1100D65306
30	57	50	35	52.5	20.3	1.2	20	27	260	9.7	12.4	SMCD_306+1100D65306
35	57	55	45	52.5	20.3	1.2	20	27	260	8.4	14.3	SMCD_356+1100D65306
40	57	55	45	52.5	20.3	1.2	20	27	260	7.8	15.5	SMCD_406+1100D65306
45	57	55	45	52.5	20.3	1.2	20	27	260	6.9	17.4	SMCD_456+1100D65306
50	57	65	45	52.5	20.3	1.2	20	27	260	6.2	19.3	SMCD_506+1100D65306
55	57	65	45	52.5	20.3	1.2	20	27	260	5.6	21.3	SMCD_556+1100D65306

(1) Equivalent series resistance typical values at $f = 10 \text{ kHz}$

(2) Maximum RMS current at 10 kHz, $\theta_{\text{amb}}=70^\circ\text{C}$ (cooling-air temperature), $\Delta\theta_{\text{case}}=15^\circ\text{C}$ (container temperature rise)

(3) The symbol + means capacitance tolerance ($J=\pm 5\%$, $K=\pm 10\%$)

Metallized Polypropylene Film Capacitor (For DC Link)

■ Dimensions (mm)

$U_N, 85^\circ\text{C} : 1200\text{Vdc}$

Cap. μF	$W_{\pm 1.0}$	$H_{\pm 1.0}$	$T_{\pm 1.0}$	$P_{\pm 0.5}$	$P1_{\pm 0.5}$	$d_{\pm 0.05}$	dV/dt	$\tan\delta \times 10^{-4}$		ESR @10KHz	I_{max}	Part number
							V/us	1kHz	10kHz	m Ω	A	
1.0	32	20	11	27.5	-	0.8	90	7	55	39.5	3.5	SMCD_105+1200D22806
2.0	32	24.5	15	27.5	-	0.8	90	7	55	26.3	5.0	SMCD_205+1200D22806
3.0	32	30	16	27.5	-	0.8	90	7	55	17.5	7.5	SMCD_305+1200D22806
4.0	32	33	18	27.5	-	0.8	90	7	55	13.9	9.5	SMCD_405+1200D22806
5.0	32	37	22	27.5	-	0.8	90	7	55	12.7	10.4	SMCD_505+1200D22806
5.0	32	37	22	27.5	10.2	0.8	90	7	55	11.1	11.8	SMCD_505+1200D42806
3.0	41	30	16	37.5	-	1.0	45	13	100	37.2	3.2	SMCD_305+1200D23806
4.0	41	30	16	37.5	-	1.0	45	13	100	27.9	4.3	SMCD_405+1200D23806
5.0	41	33.5	18.5	37.5	-	1.0	45	13	100	22.3	5.4	SMCD_505+1200D23806
6.0	42	40	20	37.5	-	1.0	45	13	100	18.6	6.5	SMCD_605+1200D23806
7.0	41	37	22	37.5	10.2	1.0	45	13	100	15.9	7.5	SMCD_705+1200D43806
8.0	42	44	24	37.5	12.7	1.0	45	13	100	13.9	8.6	SMCD_805+1200D53806
9.0	42	44	24	37.5	12.7	1.0	45	13	100	12.4	9.7	SMCD_905+1200D53806
10	42	44	24	37.5	12.7	1.0	45	13	100	11.1	10.8	SMCD_106+1200D53806
12	42	45	30	37.5	12.7	1.2	45	13	100	9.3	12.9	SMCD_126+1200D53806
12	42	45	30	37.5	20.3	1.2	45	13	100	9.3	12.9	SMCD_126+1200D63806
15	42	50	35	37.5	20.3	1.2	45	13	100	7.4	16.1	SMCD_156+1200D63806
18	42	50	35	37.5	20.3	1.2	45	13	100	6.6	18.1	SMCD_186+1200D63806
20	42	55	40	37.5	20.3	1.2	45	13	100	6.0	20.1	SMCD_206+1200D63806
25	42	60	45	37.5	20.3	1.2	45	13	100	4.8	25.1	SMCD_256+1200D63806
12	57	45	25	52.5	12.7	1.2	23	24	200	19.9	6.0	SMCD_126+1200D55306
15	57	45	25	52.5	12.7	1.2	23	24	200	15.9	7.5	SMCD_156+1200D55306
20	57	45	30	52.5	12.7	1.2	23	24	200	11.9	10.0	SMCD_206+1200D55306
20	57	45	30	52.5	20.3	1.2	23	24	200	11.9	10.0	SMCD_206+1200D65306
25	57	50	35	52.5	20.3	1.2	23	24	200	9.6	12.6	SMCD_256+1200D65306
30	57	55	45	52.5	20.3	1.2	23	24	200	8.0	15.1	SMCD_306+1200D65306
35	57	55	45	52.5	20.3	1.2	23	24	200	6.8	17.6	SMCD_356+1200D65306
40	57	65	45	52.5	20.3	1.2	23	24	200	6.0	20.1	SMCD_406+1200D65306
45	57	65	45	52.5	20.3	1.2	23	24	200	5.3	22.6	SMCD_456+1200D65306

Metallized Polypropylene Film Capacitor (For DC Link)

■ 檢驗要求 Inspection requirements

測試項目 Test item	性能要求 Performance requirements	試驗條件 Conditions of test		
例行試驗 Routine test				
外觀檢查 External inspection	按規定清晰的標記 Legible marking as specified	--		
尺寸 Dimensions	見規格圖紙 See specification drawing	--		
電容量 Capacitance	在規定公差內 Within the tolerance specified	室溫 1 kHz at room temperature		
損耗因素 tan δ Dissipation Factor	$1\mu\text{F} \leq C_N < 10\mu\text{F}, DF \leq 10 \times 10^{-4}$ $10\mu\text{F} \leq C_N < 20\mu\text{F}, DF \leq 20 \times 10^{-4}$ $20\mu\text{F} \leq C_N \leq 140\mu\text{F}, DF \leq 40 \times 10^{-4}$	室溫 1 kHz at room temperature		
端子間的電壓試驗 Voltage test between terminal	無可見損傷或刺穿·沒有閃絡 No visible damage or puncture, No flashover	1.5 x U _{NDC} 持續時間 Duration 10 seconds		
絕緣電阻 Insulation resistance	IR x C _N ≥ 10,000s	25°C, 100Vdc, 60 seconds		
型式試驗 Type Tests				
引出端強度試驗 Robustness of terminations	無斷線, 電容器無損壞 No wire breakage and no damage of capacitor	Tensile Ua1 (Duration : 10s±1s)		
		Wire diameter	Section	Load
		d ≤ 0.8mm	S ≤ 0.5mm ²	10N (±10%)
		d ≤ 1.25mm	S ≤ 1.2mm ²	20N (±10%)
		Bending Ub method 1 (4*90°, Duration: 2s/bend)		
		Wire diameter	Section modulus	Load
d ≤ 0.8mm	≤ 0.050mm ³	5N (±10%)		
d ≤ 1.25mm	≤ 0.019mm ³	10N (±10%)		
耐焊接熱 Resistance to soldering heat	沒有可見的損壞 No visible damage (1) ΔC/C ≤ 0.5% of the initial value (2) Increase of tan δ ≤ 0.005	無需預先乾燥, 方法 1A; No pre-drying, method 1A 焊錫槽 Solder Bath: 260±5°C 持續時間 Duration 10±1s		
振動 Vibration		頻率 F=10 Hz to 55 Hz 振幅 Amplitude±0.35mm 測試持續時間 Test duration: 10 frequency cycles 3 個軸向互成 90° 3 axes offset from each other by 90° 1 倍頻程/分钟 1 octave/min		
端子間的電壓試驗 Voltage test between terminals	(1) ΔC/C ≤ 0.5% of the initial value (2) Increase of tan δ ≤ 1.2 x initial tan δ + 0.0001 (3) IR ≥ 50 % of specified values	1.5 x U _{NDC} at T _{amb} 持續時間 Duration 60 s		

Metallized Polypropylene Film Capacitor (For DC Link)

■ 檢驗要求 Inspection requirements

測試項目 Test item	性能要求 Performance requirements	試驗條件 Conditions of test
衝擊放電試驗 Surge discharge test	(1) $\Delta C/C \leq 1.0\%$ of the initial value (2) $\tan \delta \leq 1.2 \times \text{initial } \tan \delta + 0.0001$	1.1 x U _{NDC} 放電次數 Number of discharges: 5 時間推移 Time lapse: every 2 min (10 min total) 在衝擊放電試驗之後的 5 分鐘內 Within 5 min after the surge discharge test 1.5 x U _{NDC} at T _{amb} , 持續時間 Duration 60 s
自愈性試驗 Self-healing test	(1) $\Delta C/C \leq 0.5\%$ of the initial value (2) $\tan \delta \leq 1.2 \times \text{initial } \tan \delta + 0.0001$	1.5 x U _{NDC} , 持續時間 Duration 10 s 自愈性擊穿次數 Number of clearings ≤ 5 , 以 100V/s 升壓直到 5 次自愈或 2.5 x U _{NDC} , 持續 10 s Increase the voltage at 100 V/s till 5 clearings occur or until voltage reach max. of 2.5 x U _{NDC} for a duration of 10 s
溫度變化 Change of temperature	無擊穿或閃絡 No puncturing or flashover 允許自愈擊穿 Self healing punctures are permitted (1) $\Delta C/C \leq 2.0\%$ of the initial value (2) Increase of $\tan \delta \leq 0.015$	Test Nb: 上限溫度 T _{max.} = +85°C 下限溫度 T _{min.} = -40°C 過渡時間 Transition time: 1h, 5 cycles
恒定濕熱試驗 Damp heat steady state		Test Ca: T = 40°C $\pm 2^\circ\text{C}$ RH = 93% $\pm 3\%$ 持續時間 Duration 56 days
端子間的電壓試驗 Voltage test between terminals		1.5 x U _{NDC} at T _{amb} 持續時間 Duration 60 s
熱穩定性試驗 Thermal stability test under overload conditions	溫升 Temperature rise < 1°C (1) $\Delta C/C \leq 2.0\%$ of the initial value (2) Increase of $\tan \delta \leq 1.2 \times \text{initial } \delta + 0.015$	自然冷卻 Natural cooling T _{amb} $\pm 5^\circ\text{C}$ $1.21 \times P_{\text{max.}} = (U_2/2) \times W_2 \times C \times \tan \delta =$ $1.21 \times (I_{\text{max.}}^2 / W_2 \times C) \times \tan \delta_2$ with W ₂ = 2 x p x f ₂ For I _{RMS} 見參考資料 see specific reference data f ₂ = 10 kHz 持續時間 Duration 48 h 在試驗的最後 6 h · 每 1.5 h 測量一次溫度 Measure the temperature every 1.5 h during the last 6 h
端子間的耐久性試驗 Endurance test between terminals	(1) $\Delta C/C \leq 3.0\%$ of the initial value (2) Increase of $\tan \delta \leq 0.015$	順序 Sequence: 1.3 x U _{NDC} at T _{max.} = 85°C 持續時間 Duration 500 h 1000 x discharge at 1.4 x \hat{I} (最大峰值電流 Maximum peak current) 1.3 x U _{NDC} at T _{max.} = 85°C 持續時間 Duration 500 h

Metallized Polypropylene Film Capacitor (For DC Link)

■ 薄膜電容器焊接指南 Soldering Guidelines for Film Capacitors

聚丙烯膜電容器對熱特別敏感 (聚丙烯膜的熔點為 160°C ~ 170°C) , 波峰焊可能具有破壞性 , 尤其是對於小型聚丙烯膜電容器 (引線間距為 5 mm 至 15 mm) , 焊接過程中必須非常小心。

一般來說 , IEC 出版物 61760-1 第 2 版中的波峰焊接曲線可作為成功焊接的可靠指南。(請參見圖 1)

Polypropylene capacitors are especially sensitive to heat (the melting point of polypropylene is 160 – 170°C).

Wave soldering can be destructive, especially for mechanically small polypropylene capacitors (with lead spacing of 5 – 15 mm), and great care must be taken during soldering. In general, the wave soldering curve from IEC Publication 61760-1 Edition 2 serves as a solid guideline for successful soldering. See Figure 1.

通孔的薄膜電容器不建議採用回流焊。將電容器暴露在超過上述建議限值可能會導致電容器退化或永久性損壞。

Reflow soldering is not recommended for through-hole film capacitors. Exposing capacitors to a soldering profile in excess of the recommended limits may result in degradation or permanent damage to the capacitors.

請勿將聚丙烯膜電容器通過粘合劑固化爐來固化表面安裝部件的樹脂 , 須在表面安裝零件固化後插入通孔零件。

如果通孔部件必須通過粘合劑固化過程 , 請諮詢 WINDAY , 討論烘箱中的實際溫度分布。

建議最多進行兩次焊接循環。在第二次焊接循環之前 , 請留出時間使電容器表面溫度恢復到正常溫度。


Do not place the polypropylene capacitor through an adhesive curing oven to cure resin for surface mount components.

Insert through-hole parts after curing the surface mount parts. Contact WINDAY to discuss the actual temperature profile in the oven, if through-hole components must pass through the adhesive curing process.

A maximum two soldering cycles is recommended.

Allow time for the capacitor surface temperature to return to normal before the second soldering cycle.

■ 波峰焊建議 Wave Soldering Recommendations (Figure 1)

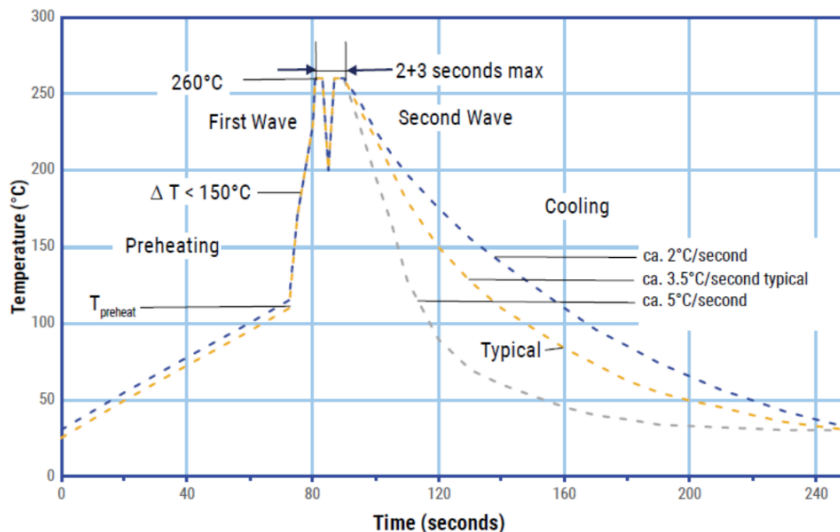

Metallized Polypropylene Film Capacitor (For DC Link)


■ 波峰焊建議 Wave Soldering Recommendations (Continue)

1. 該表顯示了焊接過程的最高設置溫度 The tables indicates the maximum set-up temperature of the soldering process

介電薄膜材料 Dielectric Film Material	最高預熱溫度 Max. Preheat Temperature		最高峰值焊接溫度 Max. Peak Soldering Temperature	
	Pitch ≤ 15 mm	Pitch > 15 mm	Pitch ≤ 15 mm	Pitch > 15 mm
聚乙酯膜 Polyester	130°C	130°C	270°C	270°C
聚丙烯膜 Polypropylene	110°C	130°C	260°C	270°C

2. 電容器內部測得的最高溫度 The maximum temperature measured inside the capacitor

介電薄膜材料 Dielectric Film Material	元件內部測得的最高溫度 Maximum Temperature Measured Inside the Element
聚乙酯膜 Polyester	160°C
聚丙烯膜 Polypropylene	110°C

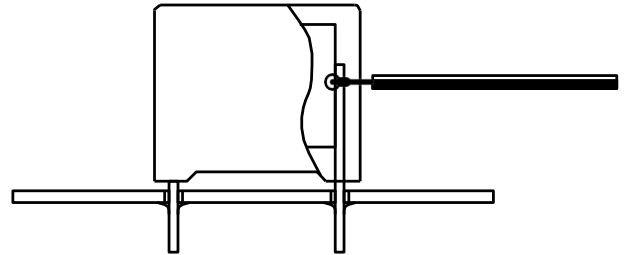

設置溫度，使元件內最高溫度低於極限：

Set the temperature so that inside the element the maximum temperature is below the limit.




■ 儲存條件和期限 Storage conditions and duration

包裝好的電容器應存放在清潔、通風、乾燥的庫房內，不靠近熱源，不受陽光直射，嚴禁與化學試劑、酸和有害氣體一起儲存。T_{stg} = +5°C 至 +35°C，最大相對濕度為 75%，無冷凝，儲存一年。

Packaged capacitors should be kept in clean, ventilated, dry coffers, not near the heat source, not subject to direct sunlight, is strictly prohibited and chemical reagents, acid and harmful gas storage together.

T_{stg} = +5°C to +35°C with relative humidity of maximum 75% without condensation, storage for one year.

■ 典型波形 Typical Waveforms

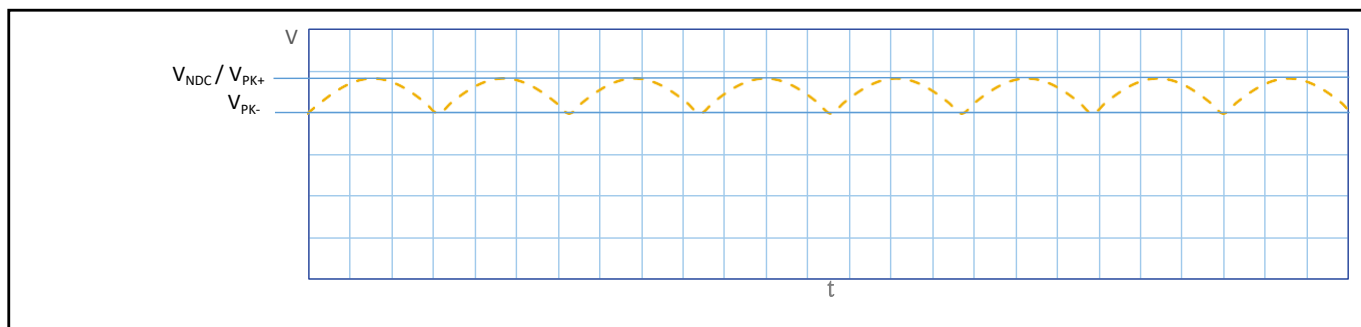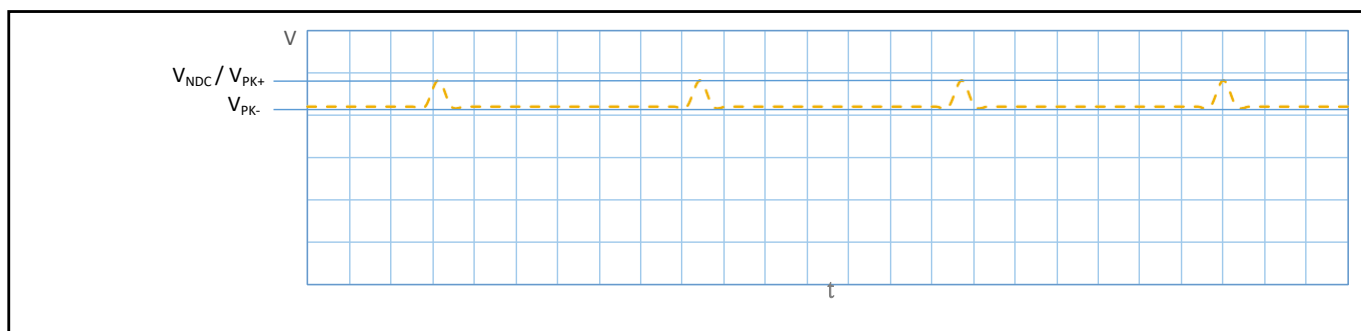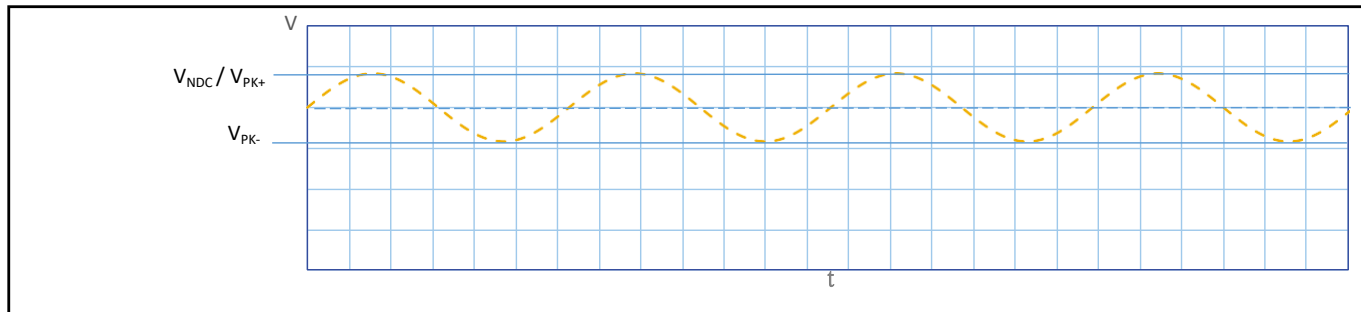

The applied peak-to-peak ripple voltage shall not exceed $0.1 \times V_{NDC}$

The peak voltage shall not exceed the rated voltage V_{NDC}